

PATENT COOPERATION TREATY

From the INTERNATIONAL BUREAU

PCTNOTIFICATION CONCERNING
TRANSMITTAL OF COPY OF INTERNATIONAL
APPLICATION AS PUBLISHED OR REPUBLISHED

To:

BARKER BRETTTELL
138 Hagley Road
Edgbaston
Birmingham B16 9PW
ROYAUME-UNI

Date of mailing (day/month/year) 28 July 2005 (28.07.2005)		
Applicant's or agent's file reference YCJ0115		IMPORTANT NOTICE
International application No. PCT/GB2004/005168	International filing date (day/month/year) 09 December 2004 (09.12.2004)	
		Priority date (day/month/year) 12 December 2003 (12.12.2003)
Applicant CHANA, Gurshara, Singh		

The International Bureau transmits herewith the following documents:

- ☐ copy of the international application as published by the International Bureau on under No. WO
- ☒ copy of international application as republished by the International Bureau on 28 July 2005 (28.07.2005) under No. WO 2005/055838
- For an explanation as to the reason for this republication of the international application, reference is made to INID codes (15), (48) or (88) (as the case may be) on the front page of the attached document.

The International Bureau of WIPO
34, chemin des Colombettes
1211 Geneva 20, Switzerland

Authorized officer

Nora Lindner

Facsimile No. +41 22 740 14 35

Facsimile No. +41 22 338 89 65

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

CORRECTED VERSION

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
23 June 2005 (23.06.2005)


PCT

(10) International Publication Number
WO 2005/055838 A1

- (51) International Patent Classification⁷: **A61B 17/17**,
A61F 2/46
- (21) International Application Number: PCT/GB2004/005168
- (22) International Filing Date: 9 December 2004 (09.12.2004)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
0328788.5 12 December 2003 (12.12.2003) GB
0402471.7 4 February 2004 (04.02.2004) GB
0419983.2 9 September 2004 (09.09.2004) GB
- (71) Applicant and
(72) Inventor: CHANA, Garsharan, Singh [GB/GB]; Ken-
wood, 57 Bracebridge Road, Sutton, Coldfield B74 2SL
(GB).
- (74) Agent: BARKER BRETTTELL; 138 Hagley Road, Edg-
baston, Birmingham B16 9PW (GB).
- (81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,
KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD,
MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG,
PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM,
TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM,
ZW.
- (84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,
ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI,
FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO,
SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN,
GQ, GW, ML, MR, NE, SN, TD, TG).
- Published:
— with international search report
— with amended claims

[Continued on next page]

(54) Title: IMPROVED TARGETING DEVICE

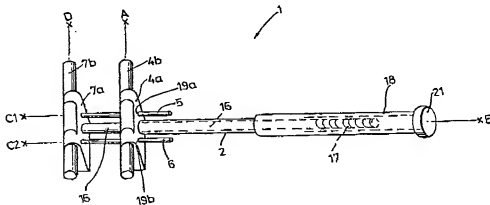

(57) Abstract: The present invention provides a targeting device (1) for use in open, or minimally invasive, hip surgery to allow the position of the centreline of the femoral neck to be located. Also disclosed is its use in location of the centreline of the femoral neck. The targeting device comprises at least a first component (4) having a portion suitable for location on an outer surface of the femoral neck and a second component (7) having a portion suitable for marking the centreline of the femoral neck, wherein the first (4) and second (7) components are spaced apart from and parallel to one another and means is provided to alter the distance between the first (4) and second (7) components and means is provided to maintain the first (4) and second (7) components in a predetermined position relative to each other.

WO 2005/055838 A1

WO 2005/055838 A1



Date of publication of the amended claims: 28 July 2005

(48) Date of publication of this corrected version:
20 October 2005

(15) Information about Correction:
see PCT Gazette No. 42/2005 of 20 October 2005, Section II

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

WO 2005/055838

PCT/GB2004/005168

AMENDED CLAIMS

[Received by the International Bureau on 13 June 2005 (13.06.05):
original claim 1 amended; original claims 53 – 58 cancelled; remaining claims
unchanged (9 pages)]

1. A targeting device for use in open, or minimally invasive, hip surgery to allow the position of the centreline of the femoral neck to be located,
5 which device comprises at least a first component having a portion suitable for location on an outer surface of the femoral neck and a second component having a portion suitable for marking the centreline of the femoral neck, wherein the first and second components are spaced apart from and parallel to one another and means is provided to alter the
10 distance between the first and second components and means is provided to maintain the first and second components in a predetermined position relative to each other and wherein one or both of the first component and the second component has a portion suitable for receipt of a guide wire.
- 15 2. A targeting device according to Claim 1 wherein the first component has a portion suitable for receipt of a first guide wire and the second component has a portion suitable for receipt of a second guide wire.
- 20 3. A targeting device according to Claim 1 wherein the first component has a portion suitable for receipt of a first guide wire or the second component has a portion suitable for receipt of a second guide wire.
4. A targeting device according to any of Claims 1 to 3 wherein the first and second components are identical in configuration.
- 25 5. A targeting device according to any preceding claim wherein each of the first and second components includes an elongate three dimensional shape for location on an outer surface of the femoral neck or for marking the centreline of the femoral neck.

30

WO 2005/055838

PCT/GB2004/005168

6. A targeting device according to Claim 5 wherein the elongate three dimensional shape is a cylinder.
7. A targeting device according to Claim 5 or Claim 6 wherein each
5 three dimensional shape of the first and second components is 2 to 8cm in length.
8. A targeting device according to any of Claims 5 to 7 wherein a central
10 bore is provided along the centre of each of the elongate three dimensional shapes of the first and second components to receive a guide wire.
9. A targeting device according to Claim 8 wherein the bore has a
15 diameter of 1.5 to 5mm.
10. A targeting device according to any preceding claim wherein the first component is provided with one or more runners, the or each runner is elongate and extends such that its longitudinal axis is perpendicular to that of the first component.
20
11. A targeting device according to claim 10 wherein the second component is provided with means to movably engage the or each runner.
12. A targeting device according to any of claims 1 to 9 wherein the
25 second component is provided with one or more runners, the or each runner is elongate and extends such that its longitudinal axis is perpendicular to that of the second component.
13. A targeting device according to claim 12 wherein the first component
30 is provided with means to movably engage the or each runner.

WO 2005/055838

PCT/GB2004/005168

14. A targeting device according to any of claims Claim 10 to 13 wherein where there are two or more runners and the runners are parallel to each other.
- 5 15. A targeting device according to any of Claims 10 to 14 wherein the or each runner is up to 6cm in length.
16. A targeting device according to preceding claim wherein one or more springs is provided between the first and second components to assist
10 movement of the second component away from the first component.
17. A targeting device according to any preceding claim wherein each of the first and second components is provided with a mounting portion and an elongate three dimensional shaped portion and the mounting portion is
15 suitably sized and shaped to receive or co-operate with the elongate three dimensional shaped portion, the or each runner and the means provided to space the first and second components from each other and maintain the first and second components parallel to each other.
- 20 18. A targeting device according to claim 17 wherein the elongate three dimensional shaped portions are releasably secured to the mounting portions.
19. A targeting device according to Claim 18 wherein the elongate three
25 dimensional shaped portion have an external screw threaded portion and the mounting portions each have one or more apertures with corresponding internal screw threaded portions to receive and hold the elongate three dimensional portion.
- 30 20. A targeting device according to any preceding claim wherein the targeting device is provided with a repositioning device comprising a

WO 2005/055838

PCT/GB2004/005168

plate to be secured to the targeting device and having one, two or more tubular components, sized to receive a guide wire, extending therefrom.

21. A targeting device according to any preceding claim wherein the means provided to alter the distance between the first and second components comprises provision of a screw threaded bar received by corresponding screw threaded portions on each of the first and second components.
22. A targeting device according to Claim 21 wherein the screw threaded bar is provided with a suitable means to cause its rotation.
23. A targeting device according to Claim 21 or Claim 22 (when dependent on any of Claims 10 to 20) wherein the longitudinal axes of the or each runner and the screw threaded bar all lie parallel to the longitudinal axis of the elongate support and the longitudinal axes of the first and second components each lie perpendicular to these axes and are spaced apart from and parallel to each other.
24. A targeting device according to any preceding claim wherein the first component is mounted on an elongate support.
25. A targeting device according to claim 24 wherein the elongate support has a handle portion distal from the first component.
26. A targeting device according to claim 24 or 25 wherein the first component is mounted on the elongate support perpendicular to the longitudinal axis of the elongate support.

WO 2005/055838

PCT/GB2004/005168

27. A targeting device according to wherein the first component is mounted on an elongate support and the second component is mounted on a bar telescopically received within the elongate support.
28. A targeting device according to any of Claims 24 to 26 wherein the bar is slidably moved into and out of the elongate support by means of a screw thread system.
29. A targeting device according to Claim 28 wherein a rotatable shaft is provided within the elongate support having a screw thread corresponding to a screw thread provided on the telescopically received bar.
30. A targeting device according to Claim 29 (when dependent on any of Claims 10 to 28) wherein the longitudinal axes of the or each runner, the elongate support and the telescopically received bar all lie parallel to the longitudinal axis of the elongate support and the longitudinal axes of the first and second components each lie perpendicular to these axes and are spaced apart from and parallel to each other.
31. A targeting device according to any preceding claim wherein the device further includes at least a third component.
32. A targeting device according to Claim 31 wherein the third component is an "L" shaped bar having a first elongate portion and a second elongate portion, the second elongate portion extending generally perpendicularly to the first elongate portion.
33. A targeting device according to Claim 32 wherein the length of the first elongate portion is greater than that of the second elongate portion.

WO 2005/055838

PCT/GB2004/005168

34. A targeting device according to claim 32 or 33 wherein the "L" shaped bar is of square or rectangular cross section.
35. A targeting device according to any of claims 32 to 34 wherein the length of the first elongate portion is from 10 to 30cm
36. A targeting device according to claim 32 to 35 wherein the "L" shaped bar is positioned parallel to and spaced apart from the first component.
37. A targeting device according to claim 36 (when dependent on any of Claims 24 to 30) wherein the "L" shaped bar is mounted on the elongate support on the side of the first component opposite to that of the second component.
38. A targeting device according to Claim 37 wherein the "L" shaped bar is mounted on the elongate support such that the first elongate portion is parallel to the first component and the "L" shaped bar is movable along the longitudinal axis of the first elongate portion.
39. A targeting device according claim 37 or 38 wherein the "L" shaped bar is mounted on the elongate support such that the free end of the second elongate portion extends as far as the longitudinal axis through the first component.
40. A targeting device according to claim 39 wherein the free end of the second elongate portion is provided with a plate perpendicular thereto which lies along the longitudinal axis through the first component.
41. A targeting device according to claim 40 wherein the length of the second elongate portion, including any plate, is the same as the distance

WO 2005/055838

PCT/GB2004/005168

between the first component and the first elongate portion of the "L" shaped bar and this distance is 2 to 5cm.

42. A targeting device according to Claim 1 wherein the first component is an "L" shaped bar having a first elongate portion and a second elongate portion, the second elongate portion extending generally perpendicular to the first elongate portion and the second component is a second component according to the first embodiment.

43. A targeting device according to Claim 42 wherein the second component is movable in relation to the "L" shaped bar such that the second component is spaced apart from the free end of the second elongate portion of the "L" shaped bar by a distance that is half of the diameter of the femoral neck to allow the centreline through the femoral neck to be determined.

44. Use of the targeting device of any of Claims 1 to 42 in a method of locating the centre of the osteotomised base of the femoral neck at the head-neck junction, which method comprises:

20

-measuring the diameter of the femoral neck;

-dividing the diameter of the femoral neck by two to give value X and setting the distance between the first and second components of the targeting device as X;

25

-determining the mid line through the femoral neck in the AP plane and running a guide wire along this line through the first component of the targeting device of the present invention.

30

WO 2005/055838

PCT/GB2004/005168

45. Use according to claim 44 wherein a second guide wire is passed through the second component to mark the centre of the osteotomised femoral neck.
- 5 46. Use according to Claim 45 wherein the targeting device is then removed leaving at least the second guide wire in place.
47. Use according to any of Claims 44 to 46 wherein an "L" shaped bar is provided and positioned such that the free end of the second elongate
- 10 portion of the "L" shaped bar rests on the femoral neck on the midline in the AP plane.
48. Use of a targeting device according to any of Claims 32 to 41 in a method of locating the centreline through the femoral neck and femoral
- 15 head, which method comprises:
- measuring the diameter of the femoral neck;
 - 20 -dividing the diameter of the femoral neck by two to give value X and setting the distance between the first and second components of the targeting device as X;
 - determining the mid line through the femoral neck in the AP plane;
 - 25 -positioning the free end of the second elongate portion of the "L" shaped bar on the femoral neck on the midline in the AP plane;
 - determining the centreline through the femoral neck and femoral
 - 30 head by position of the second component.

WO 2005/055838

PCT/GB2004/005168

49. Use according to Claim 48 wherein a guide wire is passed through the first component once its position has been determined using the "L" shaped bar.

5 50. Use according to Claim 49 wherein a second guide wire is passed through the second component to mark the central longitudinal axis of the femoral neck.

51. Use according to Claim 50 wherein the targeting device is then
10 removed leaving at least the second guide wire in place.

52. Use according to any of Claims 48 to 51 wherein the diameter of the femoral neck is measured using callipers or a suitable calibrated gauge.

15